

Pin Cylinder: Single Acting, Spring Return

CJP Series

ø4, ø6, ø10, ø16



How to Order

Embedded type

Panel mount type

CJP B 16 - 15 H4 Z - [] T - []



Pin cylinder

Mounting

B	Panel mount type
S	Embedded type

Panel mount type

Embedded type



Bore size

4	4 mm
6	6 mm
10	10 mm
16	16 mm



Standard stroke [mm]

ø4, ø6, ø10, ø16	5, 10, 15
-------------------------	-----------

• Made to order (ø6 to ø16)

* For details, refer to the table below.

• Rod end cap

Nil	Without cap
T	Rod end cap (Flat type) 
U	Rod end cap (Round type) 

* Rod end cap is included in the same package. Use the rod end nut of the standard cylinder to tighten the rod end cap.
* Applicable for rod end with thread type

• Rod end thread

Nil	With thread
B	Without thread

• Hose nipple

(Applicable to the mounting type B panel mount type (ø6 to ø16) only.)


(Hose nipple is not attached to the embedded type.)

Nil	Without hose nipple
H4	For ø4/ø2.5 tubing
H6	For ø6/ø4 tubing

* For details, refer to page 8.

Symbol

Single acting, Spring return



Specifications

Action		Single acting, Spring return	
Maximum operating pressure		0.7 MPa	
Minimum operating pressure	ø4	0.3 MPa	
	ø6	0.2 MPa	
	ø10, ø16	0.15 MPa	
Proof pressure		1 MPa	
Ambient and fluid temperatures		-10 to 70°C (No freezing)	
Lubrication		Not required (Non-lube)	
Piston speed		50 to 500 mm/s	
Cushion		None	
Stroke length tolerance		+1.0 0	
Rod end type		With thread/Without thread	
Mounting		Panel mount type	Embedded type
Accessory (Standard equipment)	Standard equipment	Mounting nut (2) Rod end nut (2)*1	Mounting nut (1) Gasket (1) Rod end nut (2)*1
	Option	Hose nipple (Excludes ø4)	—

*1 When rod end is threaded

* For details about the hose nipple (accessory), refer to page 8.

Weight

Bore size [mm]	Stroke [mm]		
	5	10	15
4	10	13	15
6	10.6	13.1	15.6
10	28	33	38
16	72	82	92

* Weight of hose nipple (4 g) for panel mounting is excluded.

Hose Nipple Dedicated for Panel Mount Type (With fixed orifice)

Applicable tubing	Part no.
For $\phi 4/\phi 2.5$ tubing	CJ-5H-4
For $\phi 6/\phi 4$ tubing	CJ-5H-6

Theoretical Output

Bore size [mm]	Operating direction	Operating pressure [MPa]		
		0.3	0.5	0.7
4	OUT	0.97	3.48	6.00
	IN	1.0		
6	OUT	4.56	10.2	15.9
	IN	1.42		
10	OUT	17.6	33.3	49.0
	IN	2.45		
16	OUT	44.5	84.7	124.9
	IN	5.04		

Spring Reaction Force

Bore size [mm]	Stroke [mm]	Spring reaction force [N]	
		Secondary	Primary
4	5, 10, 15	2.80	1.00
6	5, 10, 15	3.92	1.42
10	5, 10, 15	5.98	2.45
16	5, 10, 15	15.78	5.04


* Same spring force for each stroke

Allowable Kinetic Energy

⚠ Caution


When driving an inertial load, operate a cylinder with kinetic energy within the allowable value. The range in the chart below that is delineated by bold solid lines indicates the relation between load mass and maximum driving speeds.

Bore size [mm]	4	6	10	16
Piston speed [m/s]	0.05 to 0.5			
Allowable kinetic energy [J]	0.5×10^{-3}	3×10^{-3}	8×10^{-3}	19×10^{-3}

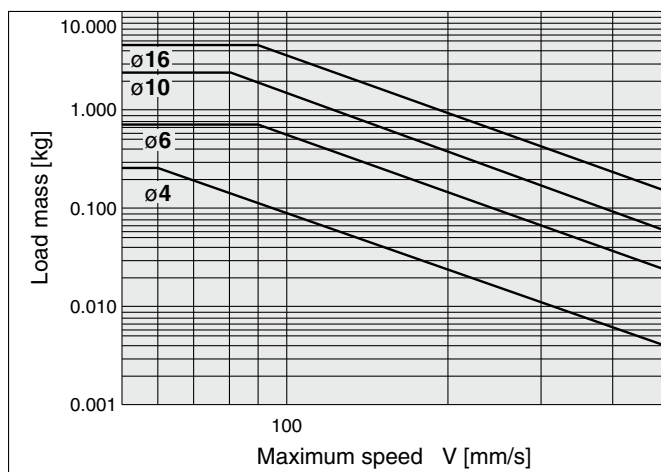

Allowable Lateral Load


Strictly observe the limiting range of lateral load on a piston rod. (Refer to the below graph.) If this product is used beyond the limits, it may shorten the machine's life or cause damage.

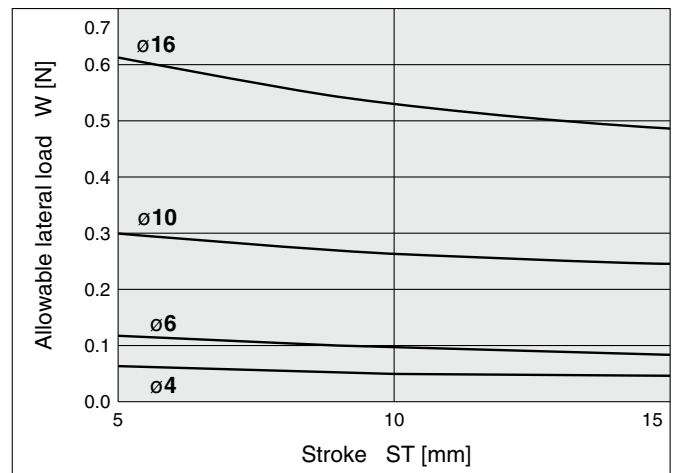


CJP Series

Construction (Not able to disassemble.)

Panel Mount Type

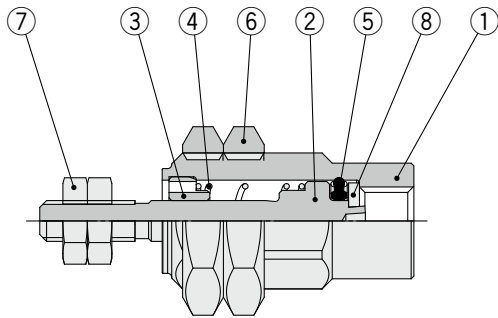

Embedded Type

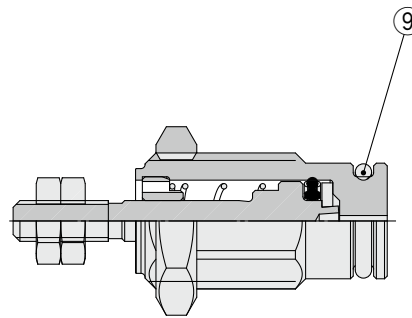

Component Parts

No.	Description	Material	Note		
1	Tube	Brass	Electroless nickel plating		
2	Piston	Stainless steel			
3	Collar	ø4, ø6, ø10	Brass	ø4, ø6, ø10	Electroless nickel plating
		ø16	Oil-impregnated sintered alloy	ø16	—
4	Return spring	Steel wire	Zinc chromating		
5	Piston seal	NBR			
6	Mounting nut	ø4	Brass	Electroless nickel plating	
		ø6, ø10, ø16	Steel	Zinc chromating	
7	Rod end nut	Steel	Zinc chromating		
8	Seal retainer	Stainless steel	Only applicable to ø6, ø10, and ø16		
9	Gasket	NBR	Embedded type only		

Replacement Parts: Gasket

Bore size [mm]	Order no.	Contents
4	CJPS4-G	Above no. ⑨
6	CJPS6-G	
10	CJPS10-G	
16	CJPS16-G	


* For the embedded type
 * Since gaskets (10 pcs./set) do not include a grease pack (10 g), order it separately.

Grease pack part number:
GR-S-010 (10 g)

Dimensions


Panel Mount Type

CJPB4

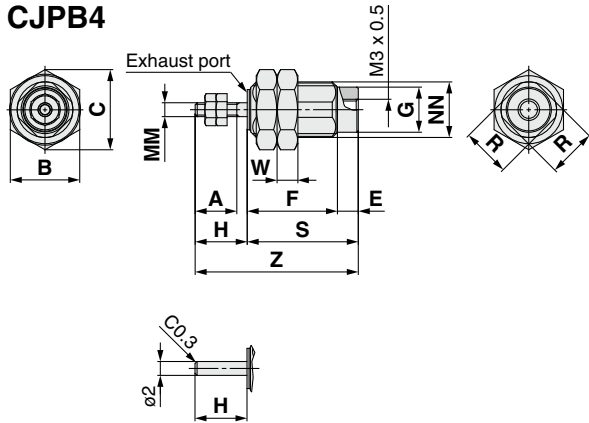

Without rod end thread
CJPB4-□-B

CJPB6/10/16

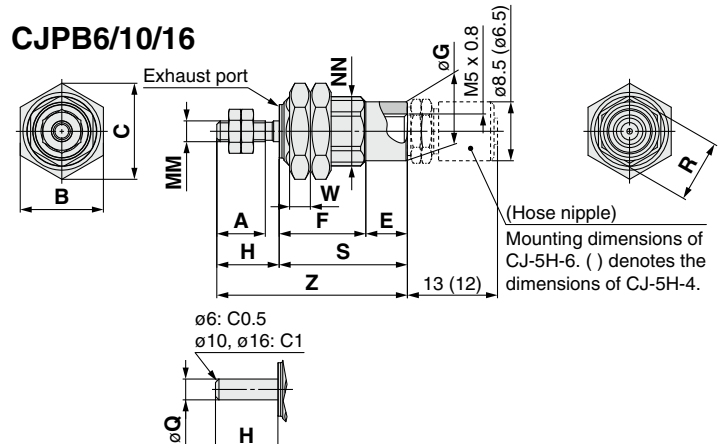


Without rod end thread
CJPB□-□-B

Bore size	A	B	C	E	F			G	H	MM	NN	R	S			W	Z			Q
					5 st	10 st	15 st						5 st	10 st	15 st		5 st	10 st	15 st	
4	6	10	11.5	3	13	21	29	6.5	7.5	M2 x 0.4	M8 x 1.0	7	16	24	32	3	23.5	31.5	39.5	2
6	7	12	13.9	6	12.5	19.5	26.5	8.5	9	M3 x 0.5	M10 x 1.0	9	18.5	25.5	32.5	3	27.5	34.5	41.5	3
10	10	19	22	6	14.5	21	28	12	12	M4 x 0.7	M15 x 1.5	13	20.5	27	34	4	32.5	39	46	5
16	12	27	31	7	16.5	22.5	29	19	14	M5 x 0.8	M22 x 1.5	20	23.5	29.5	36	5	37.5	43.5	50	6


Embedded Type

CJPS4

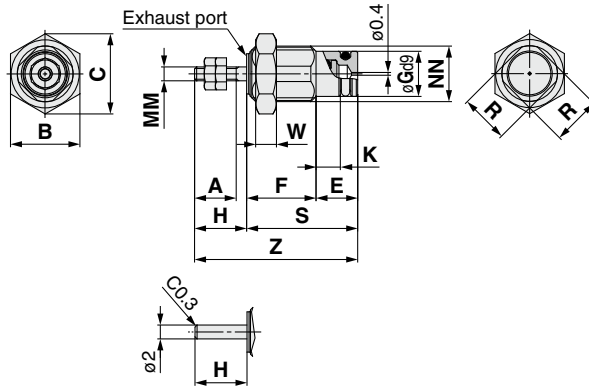

Without rod end thread
CJPS4-□-B

CJPS6/10/16

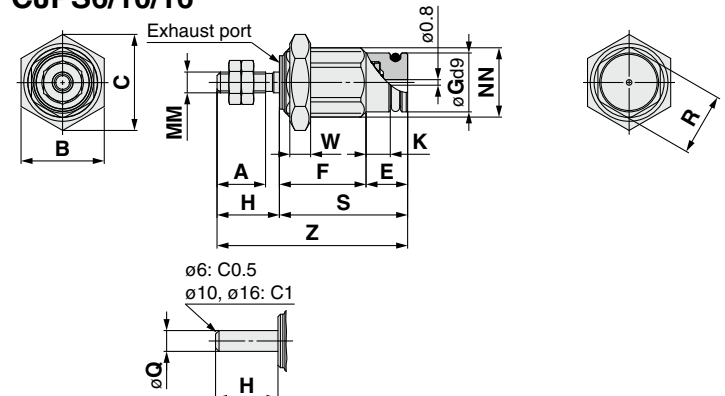


Without rod end thread
CJPS□-□-B

Bore size	A	B	C	E	F			G	H	K	MM	NN	R	S			W	Z			Q
					5 st	10 st	15 st							5 st	10 st	15 st		5 st	10 st	15 st	
4	6	10	11.5	6	10	18	26	6.5	7.5	3.5	M2 x 0.4	M8 x 1.0	7	16	24	32	3	23.5	31.5	39.5	2
6	7	12	13.9	6	12.5	19.5	26.5	8.5	9	3.5	M3 x 0.5	M10 x 1.0	9	18.5	25.5	32.5	3	27.5	34.5	41.5	3
10	10	19	22	6	14.5	21	28	12	12	3.5	M4 x 0.7	M15 x 1.5	13	20.5	27	34	4	32.5	39	46	5
16	12	27	31	7	16.5	22.5	29	19	14	4.2	M5 x 0.8	M22 x 1.5	20	23.5	29.5	36	5	37.5	43.5	50	6

Recommended Mounting Hole Dimensions for Embedded Type

Machining dimensions for mounting



Bore size	Stroke	A	B	C	D	E	F
4	5	12	8.5	6	3.5	M8 x 1.0	6.5
	10	20	16.5	14			
	15	28	24.5	22			
6	5	16	12.5	10	3.5	M10 x 1.0	8.5
	10	23	19.5	17			
	15	30	26.5	24			
10	5	17	13.5	10.5	3.5	M15 x 1.5	12
	10	23.5	20	17			
	15	30.5	27	24			
16	5	19	14.5	11.5	4.5	M22 x 1.5	19
	10	25	20.5	17.5			
	15	31.5	27	24			


* E and øFH8 should be machined in a concentric manner.

CJP Series


Accessory Bracket Dimensions

Rod End Cap

Flat Type: CJ-CF□

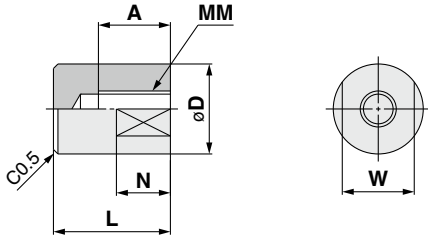

Round Type: CJ-CR□

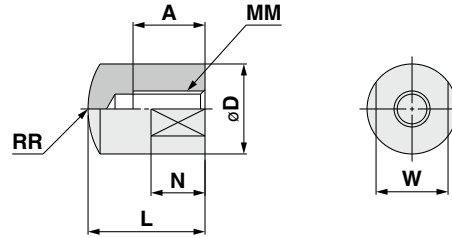

Material: Polyacetal [mm]

Part no.		Applicable bore size [mm]	A	D	L	MM	N	RR	W
Flat type	Round type								
CJ-CF004	CJ-CR004	4	5	6	9	M2 x 0.4	3	6	5
CJ-CF006	CJ-CR006	6	6	8	11	M3 x 0.5	5	8	6
CJ-CF010	CJ-CR010	10	8	10	13	M4 x 0.7	6	10	8
CJ-CF016	CJ-CR016	16	10	12	15	M5 x 0.8	7	12	10

* Rod end nut is not included when rod end cap is ordered individually. (Please use the rod end nut of the standard cylinder.)

* Applicable only for the rod end with the thread type